



Actinic BL TL/TL-D/T5

Actinic BL TL-D 15W/10 1SL

Tubular low-pressure mercury vapour fluorescent lamps

Product data

• Product Data

Order code	710932 40
Full product code	871150071093240
Full product name	Actinic BL TL-D 15W/10 1SL
Order product name	Actinic BL TL-D 15W/10 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500710932
Bar code on outerbox - EAN3	8711500710949
Logistic code(s) - 12NC	928024801029
Net weight per piece	59.600 gr

• General Characteristics

Cap-Base	G13 [G13]
Bulb	T26
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	8000 hr
EM	

• Electrical Characteristics

Rated Lamp Wattage	15 W
Technical Lamp	15 W
Power	
Lamp Voltage	51 V
Lamp Current	0.34 A

• Environmental Characteristics

Mercury (Hg) Content	5.5 mg
----------------------	--------

• Light Technical Characteristics

Colour Code	10
Colour Designation	Actinic
Chromaticity Coordinate X	222 -
Chromaticity Coordinate Y	210 -
Depreciation 5000 hours	30 %
Depreciation 2000 hours	25 %

• UV-related Characteristics


UV-A Radiation 100hr (IEC)	3.5 W
UV-B/UV-A (IEC)	0.2 %

• Product Dimensions

Base Face to Base Face A	437.4 mm
Insertion Length B	442.1 (min), 444.5 (max) mm
Overall Length C	451.6 mm
Diameter D	28 mm


PHILIPS
sense and simplicity

Dimensional drawing





TL-D G13

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 15W/10	437.4	442.1	444.5	451.6	28



Photometric data

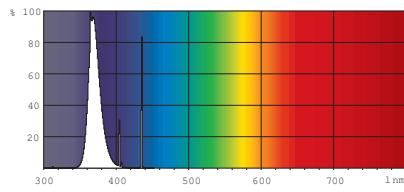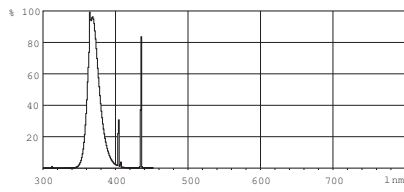

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, March 19
data subject to change