



MASTER TL-D Super 80

MASTER TL-D Super 80 18W/830 1SL

Fluorescent lamps with a diameter of 26 mm

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Cap-Base Information	Green Plate
Bulb	T8 [26 mm]
Life to 50% failures EM	15000 hr
Life to 50% fail	20000 hr
Preheat EL,3h	
Life to 50% fail	12000 hr
Nonpreh EL,3h	
Life to 10% fail	10000 hr
Nonpreh EL,3h	
Life to 10% fail	17000 hr
Preheat EL,3h	
Life to 10% failures EM	12000 hr
LSF EM 12000h	90 %
Rated,3h cycle	
LSF EM 8000h Rated, 3h cycle	95 %
LSF EM 6000h Rated, 3h cycle	96 %
LSF EM 4000h Rated, 3h cycle	97 %
LSF EM 2000h Rated, 3h cycle	99 %

• Electrical Characteristics

Lamp Wattage	18 W
Dimmable	Yes
Lamp Current EM 25°C	0.360 A
Lamp Wattage EM 25°C, Rated	18.0 W
Lamp Wattage EM 25°C, Nominal	18 W

Lamp Voltage EM 25°C	59 V
----------------------	------

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	2.0 mg

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Chromaticity Coordinate X	439 -
Chromaticity Coordinate Y	404 -
Luminance Average EM	1.00 cd/cm ²
Lum Efficacy Rated EM 25°C	75 Lm/W
LLMF EM 12000h Rated	91 %
LLMF EM 8000h Rated	93 %
LLMF EM 6000h Rated	94 %
LLMF EM 4000h Rated	95 %
LLMF EM 2000h Rated	96 %



asimpleswitch.com

PHILIPS

sense and simplicity

MASTER TL-D Super 80

Luminous Flux EM 25°C, Rated	1350 Lm
Luminous Flux EM 25°C, Nominal	1350 Lm
Design Temperature	25 C

• Product Dimensions


Base Face to Base Face A	589.8 (max) mm
Insertion Length B	594.5 (min), 596.9 (max) mm
Overall Length C	604 (max) mm
Diameter D	28 (max) mm

• Product Data


Order code	927920083023
------------	--------------

Full product code	927920083023
Full product name	MASTER TL-D Super 80 18W/830 1SL
Order product name	MASTER TL-D Super 80 18W/830 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500631657
Bar code on outerbox - EAN3	8711500631664
Logistic code(s) - 12NC	927920083023
ILCOS code	FD-18/30/1B-E-G13
Net weight per piece	71.000 gr



Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 18W/830/GP	589.8	594.5	596.9	604	28



Photometric data

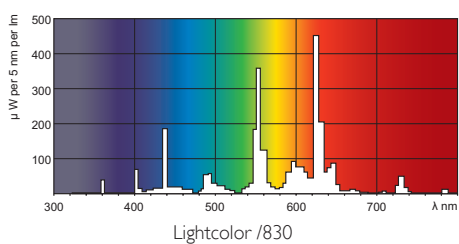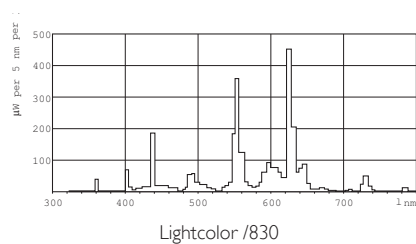

Lamps being part of this product family comply with Commission Regulation (EC) No 245/2009 - Ecodesign requirements, applicable from 13 April 2010.

1.3 Product information requirements on lamps

- a) Nominal and rated lamp wattage;
 - b) Nominal and rated lamp luminous flux;
 - c) Rated lamp efficacy at 100 h in standard conditions (25 °C, for T5 lamps at 35 °C). For fluorescent lamps both at 50 Hz (mains frequency) operation (where applicable) and at High Frequency (> 50 Hz) operation (where applicable) for the same rated luminous flux in all cases, indicating for High Frequency operation the calibration current of the test conditions and/or the rated voltage of the HF generator with the resistance. It shall be stated in a conspicuous manner that the power dissipated by auxiliary equipment such as ballasts is not included in the power consumed by the source;
 - d) Rated lamp Lumen Maintenance Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - e) Rated lamp Survival Factor at 2000 h, 4000 h, 6000 h, 8000 h, 12000 h, 16000 h and 20000 h (up to 8000 h only for new lamps on the market where no data is yet available), indicating which operation mode of the lamp was used for the test if both 50 Hz and High Frequency operation are possible;
 - f) Lamp mercury content as X.X mg;
 - g) Colour Rendering Index (Ra) of the lamp;
 - h) Colour temperature of the lamp;
 - i) Ambient temperature inside the luminaire at which the lamp was designed to maximise its luminous flux. If this temperature is equal to or lower than 0 °C or equal to or higher than 50 °C it shall be stated that the lamp is not suitable for indoor use at standard room temperatures;
 - j) For fluorescent lamps without integrated ballast, the energy efficiency index(es) of ballasts as defined in Table 17 with which the lamp can operate.
- See Table 17-EuP245.pdf for Table 17 - Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps.
- For more information see: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:076:0017:0044:EN:PDF>



© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, May 24
data subject to change