

SYLVANIA

Blacklight lamps



SYLVANIA



Airborne insects such as the common house fly, wasps, midges, etc. can each carry up to 4 million bacteria. The potential for contamination occurs wherever they land, and their presence is absolutely unacceptable in areas of hygiene. Sylvania manufactures a powerful arsenal of UV-A lamps to attract these insects so that they can either be destroyed, or decontaminated in a humane fashion. The product range includes numerous shapes, sizes and different spectra to suit every application.

UV-A lamps enjoy numerous spin-off applications in other industries as well. One of the most important is to be found in the cosmetics business, where UV-A tubes are employed in the gel method of professional finger nail curing.



BLACKLIGHT LAMPS

Insect trapping **4**

HACCP **5**

Blacklight BL350 **6-7**

Blacklight Quantum **8-9**

Blacklight Toughcoat™ **10-11**

Insect trapping

INSECT TRAPPING: HOW DOES IT WORK?

All insect traps rely on the fundamental phenomenon that flying insects are attracted to long wave UV-A radiation. However in order to maximise the efficiency of traps, we need a deeper understanding of when and why insects are attracted.

To take the example of mosquitoes, the process starts with the preparation for birth of the baby insects. The mother mosquito lays her eggs in a dark and damp place, where the babies will be able to shelter and mature. The choice of location is very important, because the newly born insects are especially prone to dehydration. Indeed after hatching, they can only venture out in the absence of solar rays, which would cause dehydration and death.

Since they can emerge only in the dark, their eyes have evolved to be especially sensitive to the low level UV-A night time radiation. Natural instinct drives them towards better lit areas where they can see more easily, and these can be produced artificially with the aid of UV-A lamps.

As the young insect matures, its resistance to the perils of dehydration begins to strengthen. Eventually it is capable of flying in the early evening under greater levels of sunlight, and its eyes begin to lose their UV sensitivity. Clearly then, the efficiency of UV traps works best with younger insects.

By the time the young females are ready to lay their own eggs, their sensitivity to UV is completely gone. In its place, a ravishing thirst for blood draws them to the scent and heat of human and animal bodies. However the female remains eager to find a safe place to lay her eggs, and natural instinct will draw her towards the same kind of dark and humid locations that she originally hatched in.

We can learn much from this life story of the mosquito in order to mount an effective campaign of disinfection. The optimum time for the use of traps is at the beginning of spring – to capture the UV-sensitive creatures as soon as they hatch. Lamps should be energised at dusk and switched off at dawn, destroying the young population to prevent further breeding. When summer then draws, the numbers of adults will have been dramatically reduced. However the traps must be left operational to attract long-range insects flying in from other areas which have not been disinfected.

THE HARMFUL EFFECTS OF INSECTS

Flying insects have an appetite for our leftovers – satisfying their hunger on rotting organic matter. It goes without saying that our decomposing waste is literally teeming with pathogenic substances. During feeding the insects pick these up, and will subsequently spread them everywhere they land. Many of these pathogens are particularly harmful to humans:

- Streptococci cause infections of the digestive system and skin.
- Campylobacter leads to dangerous intestinal infections.
- Chlamydia parasite nests inside us causing serious ill health.
- Klebsiella causes painful infection of the urinary tracts, and respiratory system.

However it's not only flying creatures which have to be targeted. Just as harmful are the flour beetle, the bread weevil, the Trogoderma (warehouse beetle) and the Tigola. Constant protection of the critical areas is of great importance.

In order to minimize these harmful effects, certain guidelines and regulations have been established in many countries. The best example is the HACCP-system. See following page.



HACCP

WHAT IS HACCP?

HACCP (Hazard Analysis Critical Control Points) is a hygienic means of controlling and monitoring aimed at safeguarding the health of the consumer.

BUSINESS CATEGORIES COVERED BY THE STANDARD

It is a legal obligation to provide adequate protection in all businesses which manufacture, prepare, process, package, store, transport, handle, sell or supply foodstuffs to the consumer. For example:

- restaurants
- bars, confectioners
- food, fruit and vegetable resellers
- grocers, delicatessens
- butchers, fishmongers
- bakers
- chemists

WHERE DOES THE STANDARD APPLY?

Analysis of the relevant business operation will reveal a number of critical areas, where laws demand that specified controls must be implemented. The HACCP approach is a scientific method to prevent and discover the causes of any particular problem, for instance:

- It identifies and minimises the risks of food contamination
- It facilitates the execution of formal inspections
- It promotes a system of open and transparent competition with consumer protection as the objective. It applies not only to finished goods but the whole production cycle.



Courtesy Moel

Blacklight BL350

The BL350 tubes represent Sylvania's original and standard range. These lamps emit UV-radiation between 315 nm and 400nm with a peak at 352nm. This range of UV-A radiation attracts insects, mainly flies and mosquitoes.

The lamps exist in linear, circline and compact versions. They are electrically and dimensionally equivalent to other fluorescent lamps of similar ratings.

Besides insect trapping they also enjoy widespread applications in diazo printing machines, chemical processing, photo polymerisation and mineral detection. A new application, mostly for compact lamps, is nail curing devices. Sylvania's compact BL-lamps guarantee that the drying process does not last longer than 2 minutes. The result is naturally shining and strong nails.



Courtesy Moel






Courtesy Pest West

DIRECTIONS FOR USE

Maximum exposure limits are set by EN60335-2-59:1997 at an effective 1,0 milliWatt per metre squared (1,0 mW/m²) measured at a distance of 1 metre – originally based on the recommendations of the National Radiological Protection Board in the UK. The irradiance value for a single BL-lamp measured without reflector and/or fixture, in free air at 25 celsius, is varying between 0,2 and 0,4 µW/m² depending on the wattage.



Blacklight BL350

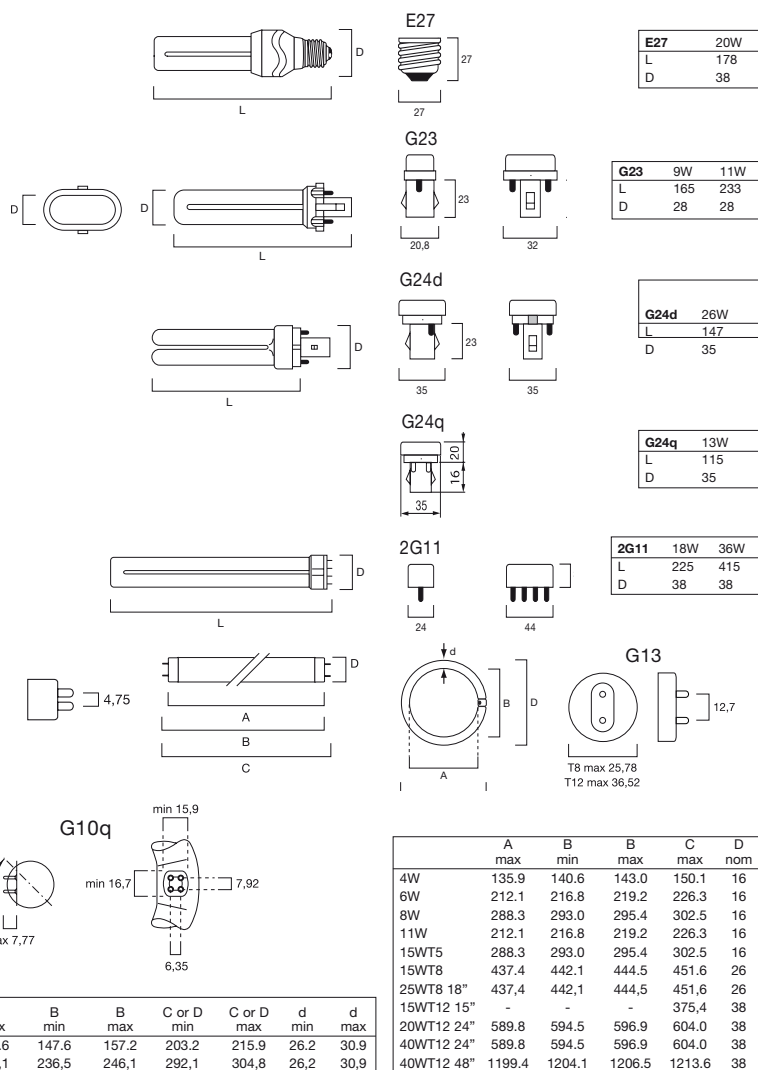

Code	Item description	Watt W	Volt V	Current A	Lamp Colour	Cap	Packing Quantity
0028318	Mini-Lynx 20W BL350 Longlife	20	230	0,160	BL350	E27	20
0025275	LYNX-S BL355 9W	9	60	0,170	BL355	G23	50
0025276	LYNX-S BL350 9W	9	60	0,170	BL350	G23	50
0025277	LYNX-S BL350 11W	11	91	0,155	BL350	G23	50
0025158	LYNX-DE BL350 13W	13	91	0,175	BL350	G24q-1	50
0025454	LYNX-D BL350 26W	26	105	0,325	BL350	G24d-3	50
0025239	LYNX-L BL350 18W	18	58	0,375	BL350	2G11	10
0025247	LYNX-L BL350 36W	36	106	0,435	BL350	2G11	10
0000007	F4 T5 BL350	4	29	0,170	BL350	G5	50
0000017	F6 T5 BL350	6	42	0,160	BL350	G5	25
0000023	F8 T5 BL350	8	56	0,145	BL350	G5	25
0000384	F11 T5 BL350	11	34	0,350	BL350	G5	25
0000045	F15 T5 BL350	15	44	0,310	BL350	G5	200
0000076	F15 T8 BL350	15	55	0,310	BL350	G13	25
0002165	F25 T8 BL350 18"	25	38	0,600	BL350	G13	25
0022918	F15 T12 BL350 500PH 15"	22	57	0,500	BL350	G13	30
0000359	F20 T12 BL350 24"	20	57	0,370	BL350	G13	25
0001635	F40 T12 BL350 24"	40	47	0,880	BL350	G13	25
0000185	F40 T12 BL350 48"	40	103	0,430	BL350	G13	25
0000489	FC22 BL350	22	62	0,400	BL350	G10q	12
0000455	FC32 BL350	32	84	0,450	BL350	G10q	12



Blacklight Quantum

Recent improvements in Phosphor technology have led to a new generation of UV-A lamp with much improved insect attraction efficiency. This range, called Quantum, is a premium high performance range offered alongside the BL350.

Two major improvements:

1. The energy distribution of the Quantum lamp is a much narrower band concentrated around the spectral peak at 365nm. This is widely accepted as the most important frequency for the attraction of flying insects. The radiation at 365nm is twice as powerful as from BL350 tubes, and because of this the lamp attracts many more insects.

2. Furthermore, the depreciation of UV-A output over time is significantly reduced. After 5000 hours of operation, the lamp maintains 80% of its original 100% output. The result is that it performs longer and better throughout the season.

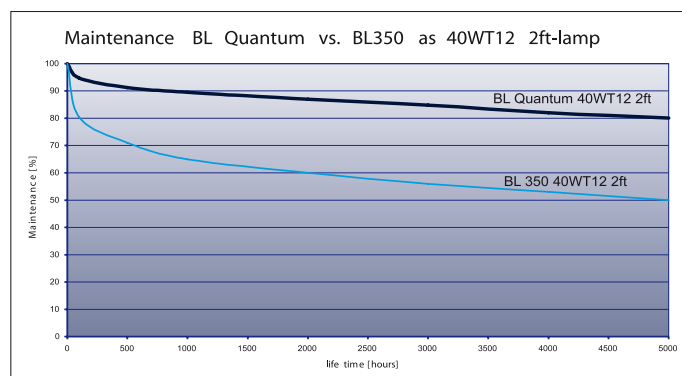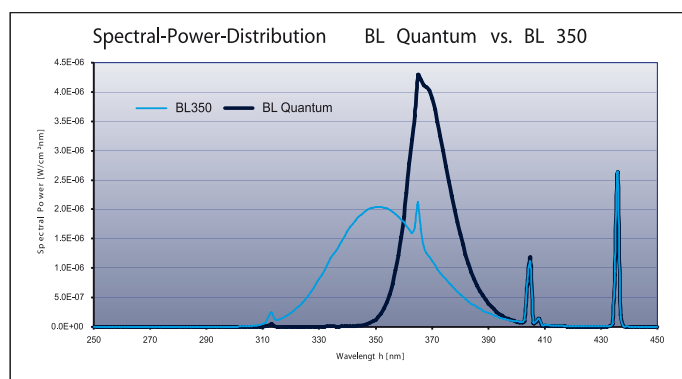

DIRECTIONS FOR USE







Maximum exposure limits are set by EN60335-2-59:1997 at an effective 1,0 milliWatt per metre squared (1,0 mW/m²) measured at a distance of 1 metre – originally based on the recommendations of the National Radiological Protection Board in the UK. The irradiance value for a single BL QUANTUM-lamp measured without reflector and/or fixture, in free air at 25 celsius, is varying between 0,2 and 0,4 µW/m² depending on the wattage.





Blacklight Quantum

	A max	B min	B max	C max	D nom
15WT8	437.4	442.1	444.5	451.6	26
20W 24"	589.8	594.5	596.9	604.0	26
40W 24"	589.8	594.5	596.9	604.0	26

	A min	A max	B min	B max	C or D min	C or D max	d min	d max
22W	149.1	155.6	147.6	157.2	203.2	215.9	26.2	30.9

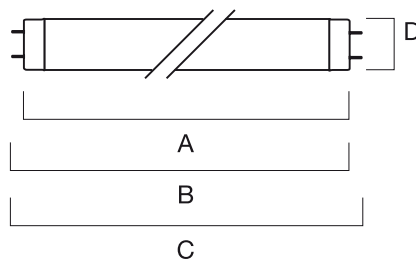

G23	9W	11W
L	165	233
D	28	28



Ordering Code	Item description	Watt W	Volt V	Current A	Lamp Colour	Cap	Cap to Cap Lamp Length mm	Packing Quantity
0000082	F15 T8 BL Quantum	15	55	0,310	Quantum-365nm	G13	437	25
0002166	F25 T8 BL Quantum 18"	25	38	0,600	Quantum-365nm	G13	451,6	25
0000361	F20 T12 BL Quantum 24"	20	57	0,370	Quantum-365nm	G13	590	25
0001638	F40 T12 BL Quantum 24"	40	47	0,880	Quantum-365nm	G13	590	25
0000456	FC22 T12 BL Quantum	22	62	0.400	Quantum-365nm	G10q	216	12
0025411	LYNX-S BL Quantum 9W	9	60	0,170	Quantum-365nm	G23	165	50

Blacklight Toughcoat™

What are Toughcoat™ lamps?


Toughcoat™ lamps are shatter resistant blacklight lamps ensuring excellent fragment retention in the event of breakage. The tubes are coated with Teflon FEP (fluorinated ethylene propylene). This coating differs from conventional PET (PolyEthylene Terphthalate) polymers in that it transmits 97% of the UV-radiation so as to maintain maximum insect attraction. FEP is also a much tougher material which will not become brittle as it ages.

Why use Toughcoat™ lamps?

For many companies, especially those operating in the food area (also restaurants), the risk of glass and mercury contamination is real. Toughcoat lamps pay dividends in avoiding injury, contamination and loss of production time in case a lamp should be broken. Within the EU, Health and Safety regulations carry heavy penalties for avoidable injury of employees, making these lamps an especially sound investment, to meet the HACCP guidelines.

High quality features

- Excellent fragment retention in the event of breakage
- The protective FEP coating meets the IEC60068-2-75 Pendulum Hammer test (5 Joule) and the 4m drop test, demonstrating excellent glass retention in the event of accidental lamp breakage.
- The 97% UV-A transmission of FEP maintains maximum insect attraction.
- No discolouration or yellowing of shatter resistant coating during the entire lamp life (> 10,000 hrs).
- The FEP material does not degrade during life. Versions employing PET coatings become brittle, and may not contain fragments. PET is also less transparent for UV-radiation..
- The coating withstands up to 200°C in both open and enclosed IP65 fittings. The melting temperature is 260°C.
- Meets all necessary regulations for resistance to heat and fire, and does not support combustion when exposed to naked flame or excessive heat. It passes the 850°C Glow Wire Test
- Satisfies the requirements of the International Food Standard (IFS 2004)
- FDA approved, in compliance with 21CFR177.1550 Regulatory Compliance Status.
- Satisfies the requirements of the BRC (British Retail Consortium) leading supermarkets global standard. In paragraph 3.2.2.6.2 it states "All bulbs and strip lights, including those on electric fly killer units, where they constitute a risk to products, shall be protected by shatterproof plastic diffusers, sleeve covers or with a shatterproof protective coating".

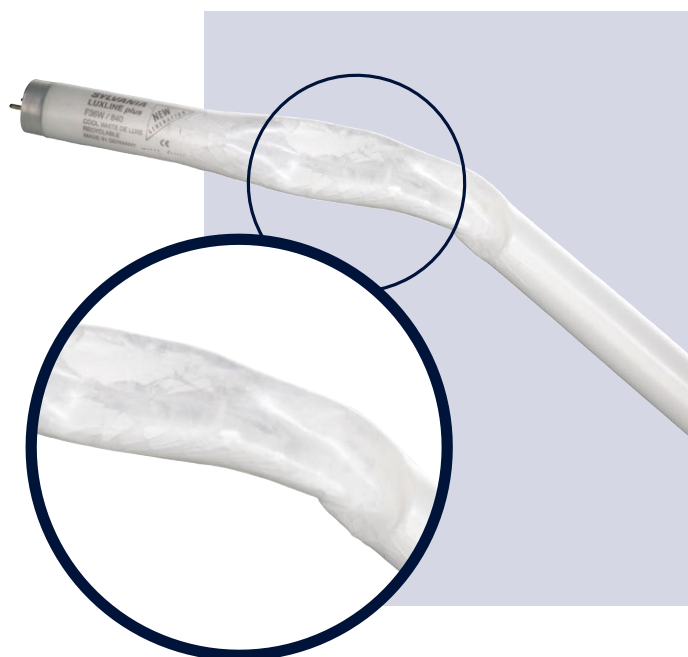


DIRECTIONS FOR USE

Maximum exposure limits are set by EN60335-2-59:1997 at an effective 1,0 milliWatt per metre squared (1,0 mW/m²) measured at a distance of 1 metre – originally based on the recommendations of the National Radiological Protection Board in the UK. The irradiance value for a single BL or QUANTUM-lamp measured without reflector and/or fixture, in free air at 25 celsius, is varying between 0,2 and 0,4 µW/m² depending on the wattage or about one-fifth of the limit.







Courtesy Pest West

Blacklight Toughcoat™

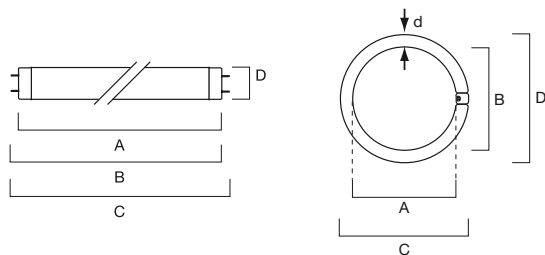

	A max	B min	B max	C max	D nom
15WT8	437.4	442.1	444.5	451.6	26
20W	589.8	594.5	596.9	604.0	26
40W/2ft	589.8	594.5	596.9	604.0	26
40W/4ft	1199.4	1204.1	1206.5	1213.6	26

	A min	A max	B min	B max	C or D min	C or D max	d min	d max
22W	149.1	155.6	147.6	157.2	203.2	215.9	26.2	30.9



Code	Item description	Watt W	Volt V	Current A	Lamp Colour	Cap	Cap to Cap Lamp Length mm	Packing Quantity
Blacklight BL350 - FEP TOUGHCOAT™								
0000133	F15W T8 BL350 TOUGHCOAT™	15	55	0,310	BL350	G13	437	25
0000127	F20W T12 BL350 TOUGHCOAT™	20	57	0,370	BL350	G13	590	25
0000128	F40W T12 2ft BL350 TOUGHCOAT™	40	47	0,880	BL350	G13	590	25
0000121	F40W T12 4ft BL350 TOUGHCOAT™	40	103	0,430	BL350	G13	1199	25
0000132	FC22W BL350 TOUGHCOAT™	22	62	0,400	BL350	G10q	216	12
Blacklight Quantum - FEP TOUGHCOAT™								
0000124	F15W T8 BL Quantum TOUGHCOAT™	15	55	0,310	Quantum-365nm	G13	437	25
0000125	F20W T12 BL Quantum TOUGHCOAT™	20	57	0,370	Quantum-365nm	G13	590	25
0000126	F40W T12 2ft BL Quantum TOUGHCOAT™	40	47	0,880	Quantum-365nm	G13	590	25

EUROPE

Austria
Vienna
T. +43 (0)1617 4480
F. +43 (0)1617 4481
info.at@havells-sylvania.com

Belgium
Antwerp
T. +32 (0)3 610 44 44
F. +32 (0)3 610 44 57
info.be@havells-sylvania.com

**Bulgaria, Romania
and Macedonia**
Sofia
T. +359 885 971 285
F. +359 2 981 34 92
info.bg@havells-sylvania.com

Czech Republic and Slovakia
Brno
T. +420 545 231 345
F. +420 545 231 346
info.cz@havells-sylvania.com

East Europe
Erlangen
T. +49 (0)9131 793 499
F. +49 (0)9131 793 496
info.de@havells-sylvania.com

Finland
Helsinki
T. +358 (0)9 5421 2100
F. +358 (0)9 5421 2130
info.fi@havells-sylvania.com

France
Paris
T. +33 (0)1 55 51 11 00
F. +33 (0)1 55 51 11 15
info.fr@havells-sylvania.com

Germany
Erlangen
T. +49 (0)9131 793 500
F. +49 (0)9131 793 345
info.de@havells-sylvania.com

Greece
Athens
T. +30 210 996 65 61
F. +30 210 996 90 29
info.gr@havells-sylvania.com

Hungary
Budapest
T. +36 (30) 50 69 182
F. +36 (24) 423 563
info.hu@havells-sylvania.com

Italy
Milan
T. +39 02 24 12 58 11
F. +39 02 24 12 58 80
info.it@havells-sylvania.com

Netherlands
Breda
T. +31 (0)76 750 44 44
F. +31 (0)76 750 44 56
info.nl@havells-sylvania.com

Norway
Oslo
T. +47 23 067470
F. +47 23 067471
info.no@havells-sylvania.com

Poland
Poznan
T. +48 510 294 820
F. +48 61 8720 413
info.pl@havells-sylvania.com

Portugal
Lisbon
T. +351 21 793 77 36/37
F. +351 21 793 77 38
info.pt@havells-sylvania.com

Russia
Moscow
T. +7 495 935 70 48
F. +7 495 937 70 08
info.ru@havells-sylvania.com

**South East Europe
Serbia, Croatia, Slovenia,
Albania, Montenegro, Bosnia
and Herzegovina**
Belgrade
T. +381 (0)63 617 716
F. +381 (0)11 2398 305
info.see@havells-sylvania.com

Spain
Madrid
T. +34 (0)91 669 90 00
F. +34 (0)91 673 73 64
info.es@havells-sylvania.com

Sweden
Årsta
T. +46 8 556 322 00
F. +46 8 556 322 10
info.se@havells-sylvania.com

Switzerland
Zurich
T. +41 44305 31 80
F. +41 44305 31 81
info.ch@havells-sylvania.com

Turkey
Istanbul
T. +90 533 433 86 78
F. +90 212 343 46 10
info.tr@havells-sylvania.com

UK (Trade)
Shipley
T. +44 1274 532552
F. +44 1274 531672
info.uk@havells-sylvania.com

UK (Export)
Shipley
T. +44 1274 537 810
F. +44 1274 537 811
info.export@
havells-sylvania.com

UK (Specification)
Newhaven
T. +44 870 606 2030
F. +44 1273 512 688
info.concord@
havells-sylvania.com

MIDDLE EAST

United Arab Emirates
Dubai
T. +971 4 2998141
F. +971 4 2998142
info.ae@havells-sylvania.com

ASIA

China
Guangzhou
T. +86 20 3815 1138
F. +86 20 3869 7572
info.cn@havells-sylvania.com

China
Hong Kong
T. +852 2732 1232
F. +852 2732 1213
info.hk@havells-sylvania.com

China
Shanghai
T. +86 21 6106 8000
F. +86 21 6873 1472
info.cn@havells-sylvania.com

India
Noida
T. +91 120 4771000
F. +91 120 4772000
marketing@havells.com

Taiwan
Taipei
T. +886 2 2708 1749
F. +886 2 2702 8933
info.tw@havells-sylvania.com

Thailand
Bangkok
T. +66 2656 9039 to 45
F. +66 2254 3369
info.th@havells-sylvania.com

Vietnam
Hanoi
T. +844 715 1604
F. +844 715 1605
info.vn@havells-sylvania.com

AMERICAS

Argentina
Buenos Aires
T. +54 11 4515 0215
F. +54 11 4515 0215
info.ar@havells-sylvania.com

Brazil
Sao Paulo
T. +55 11 3133 2400
F. +55 11 5521 3660
info.br@havells-sylvania.com

Colombia
Santafe de Bogota
T. +57 1 782 5200
F. +57 1 782 5362
info.co@havells-sylvania.com
Costa Rica

San José
T. +506 210 7678
F. +506 232 8723
info.cr@havells-sylvania.com

Ecuador
Quito
T. +593 2 328 4407
F. +593 2 281 0007
info.ec@havells-sylvania.com

El Salvador
San Salvador
T. +503 2239 2239
F. +503 2284 9670
info.sv@havells-sylvania.com

Guatemala
Guatemala City
T. +502 2387 5300
F. +502 2387 5301
info.gt@havells-sylvania.com

Mexico
Mexico D.F.
T. +52 55 5387 7670
F. +52 55 5387 7671
info.mx@havells-sli.com

Panama
Panama City
T. +507 236 1000
F. +507 236 1315
info.pa@havells-sylvania.com

USA
Mullins, SC
T. +1 843 464 0554
F. +1843 464 2897
info.us@havells-sli.com

Venezuela
Caracas
T. +58212 381 0452
F. +58212 381 0350
info.ve@havells-sylvania.com

www.havells-sylvania.com

Havells Sylvania Belgium B.V.B.A.

Industriepark 13, Soldatenplein Z2
3300 Tienen
Belgium
Phone: (+32) 16 800 366 • Fax: (+32) 16 800 367
www.havells-sylvania.com
info.special-products@havells-sylvania.com