


Halogen airfield lamps – Prefocus (Pk), cable connection

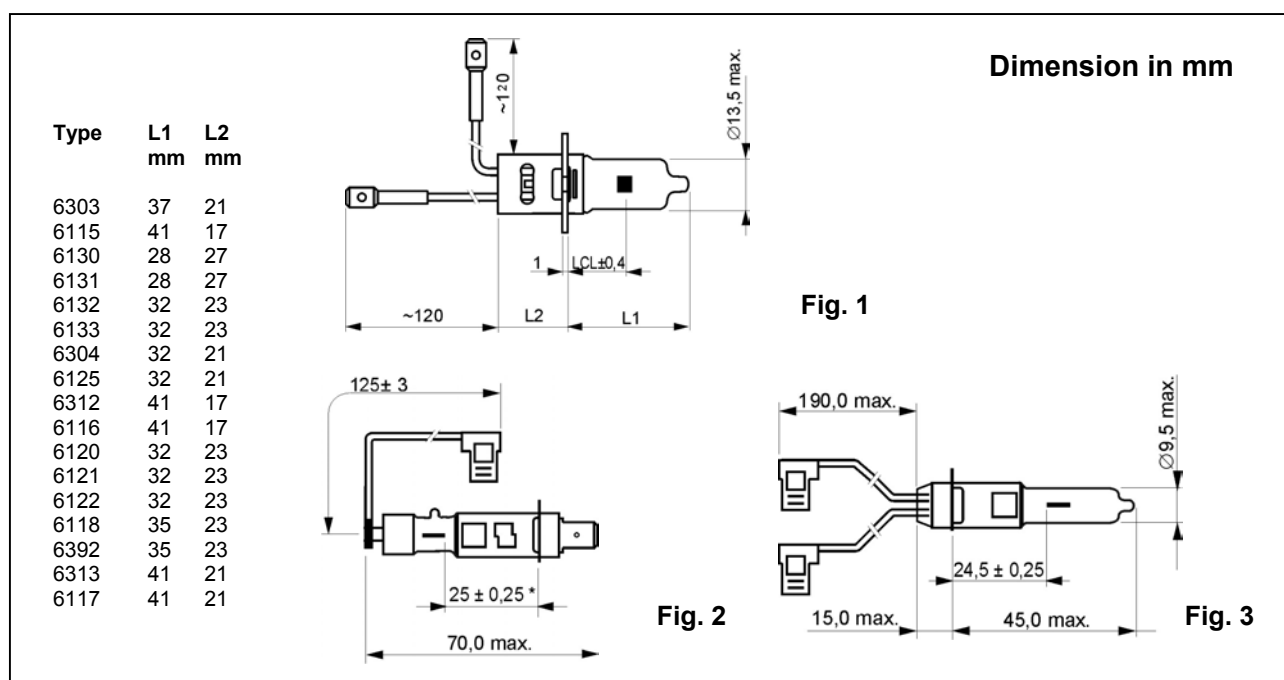

Technical and ordering data

Type	Current	Wattage	Base	Connector	Lumi- nous flux Lm	Average life hrs.	LCL mm	Filament	Fig.	Ordering number
A	W									
6367C ¹⁾	6,6	45	P18s	female	900	1000	25	C-8	2	9238 703 859..
6303	6,6	45	Pk30d	male	800	1000	16	C-8	1	9246 006 859..
6115	6,6	45	Pk30d	male	800	1000	20	C-8	1	9230 172 859..
6130	6,6	45	PKX30d	female	800	1000	16	C-8	1	9230 181 859..
6131	6,6	45	PKX30d	male	800	1000	16	C-8	1	9230 182 859..
6132	6,6	45	PKX30d	female	800	1000	20	C-8	1	9230 183 859..
6133	6,6	45	PKX30d	male	800	1000	20	C-8	1	9230 184 859..
6304	6,6	65	PKX30d	male	1450	1000	20	CBAR-6	1	9230 170 859..
6125	6,6	65	PKX30d	female	1450	1000	20	CBAR-6	1	9230 185 859..
6368C ¹⁾	6,6	100	P18s	female	2500	1000	24,5	C-8	2	9238 704 859..
6371C ¹⁾	6,6	100	Pk18d	female	2500	1000	24,5	C-8	3	9239 339 859..
6312	6,6	100	Pk30d	male	2400	1000	20	CBAR-6	1	9246 007 859..
6116	6,6	100	Pk30d	male	2700	1000	20	CBAR-6	1	9230 175 859..
6120	6,6	100	PKX30d	female	2400	1000	20	CBAR-6	1	9230 178 859..
6121	6,6	100	PKX30d	female	2700	1000	20	CBAR-6	1	9230 179 859..
6122	6,6	100	PKX30d	male	2700	1000	20	CBAR-6	1	9230 180 859..
6118	6,6	150	PKX30d	female	3600	1000	20	CBAR-6	1	9230 177 859..
6392	6,6	150	PKX30d	male	3600	1000	20	CBAR-6	1	9230 174 859..
6313	6,6	200	Pk30d	male	4400	1000	20	CC-6	1	9246 008 859..
6117	6,6	200	Pk30d	male	4800	1000	20	CC-6	1	9230 176 859..

1) ring soldering contains lead

Issue 02/2004