



MASTERColour CDM- T 150W/830 G12 1CT

Product family description

Range of single-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

Product Features

- Warm or cool white colour impression
- Colour rendering good to excellent
- Allows small-size luminaires designs that give high beam intensities

Product Benefits

- Stable colour impression over lifetime
- High lamp efficacy results in low operating costs and low heat generation
- Long lamp life compared with incandescent and halogen lamps
- Relatively low heat output enhances comfort for shoppers and staff
- All types are UV-Block for reduced fading risks

Environment

- Good environmental choice because of high energy efficiency and long reliable life
- This product is RoHS compliant
- This product is covered by WEEE

Application

- Shops and shop windows, offices and public buildings
- Decorative outdoor: floodlighting and pedestrian areas

Luminaires


- Must be used in closed luminaires with a hard-glass cover

System


- Must be used in combination with a ballast and an ignitor
- A high-current protection device (thermo-switch) in the gear is mandatory (IEC 1167)
- If there is a constant voltage deviation of more than 3% of the rated voltage, a different ballast rating/tap must be used
- Electronic gear can be used, and increases lamp-life, improves system efficacy, and eliminates visible flicker

Product data	
Order code	197801 15
Full product code	871150019780115
Full product name	MASTERColour CDM- T 150W/830 G12 1CT
Order product name	MASTERC CDM- T 150W/830 G12 1CT/12
Packing type	1 Lamp in a Folding Carton
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500197801
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500197818
Logistic code(s) - 12NC	9280 837 05104 9280 837 05128


Product data	
ILCOS code	MT- 150/30/1B- H- G12
Net weight per piece	0.033 (KG)
Successor order code	
Rated Lamp Wattage[W]	150W
Colour Code	830 [CCT of 3000K]
Cap- Base	G12
Bulb	T19[T 19mm]
Bulb Finish	Clear
Burning Position	any[Any/Universal]
Colour Rendering Index[Ra8]	85
Colour Designation (text)	Warm white
Colour Temperature[K]	3000
Lamp Luminous Flux EM[Lm]	14000

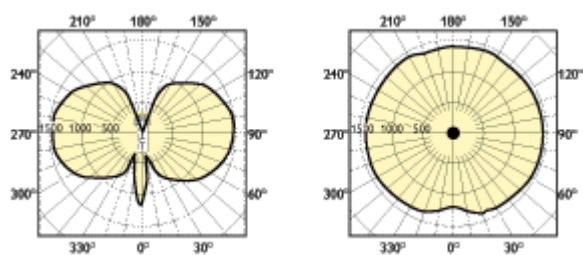


MASTERC CDM- T 150W

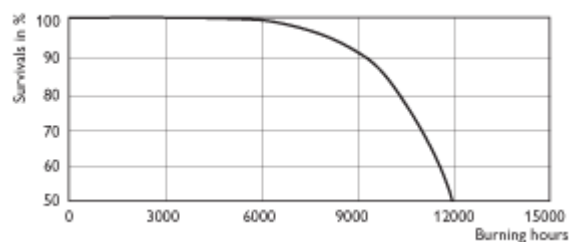


MASTERC CDM- T 70W/150W/830/942

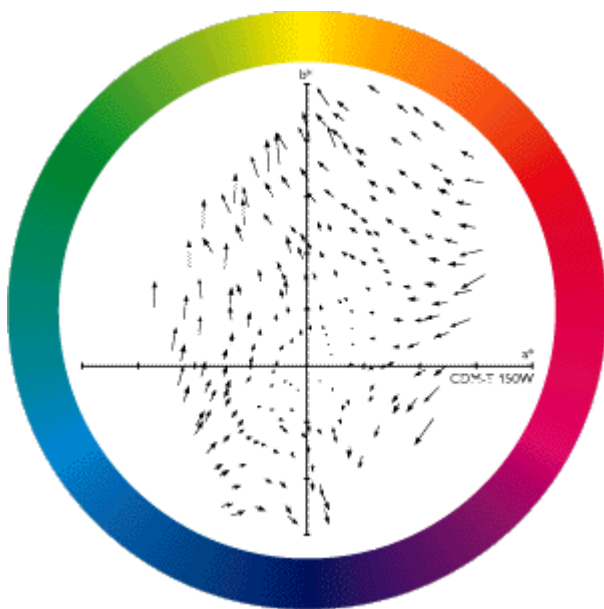


MASTERC CDM- T 150W/830

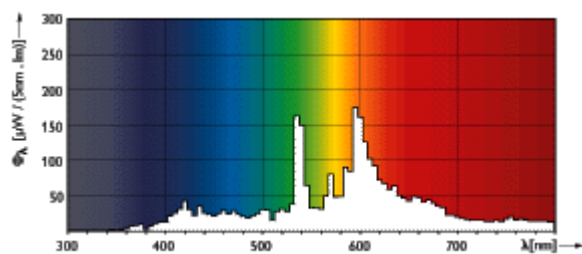


MASTERC CDM-T/830

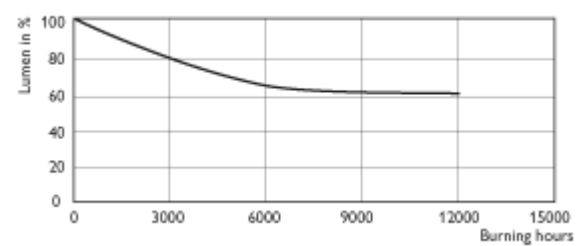


MASTERC CDM-T 70W/150W/830/942

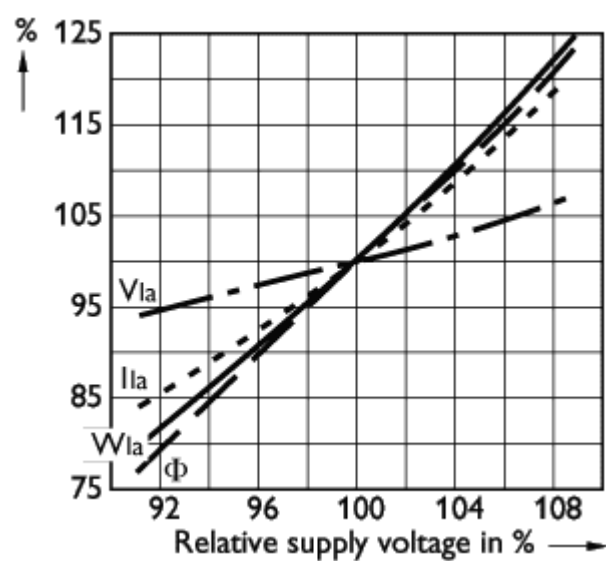

MASTERC CDM-T/830

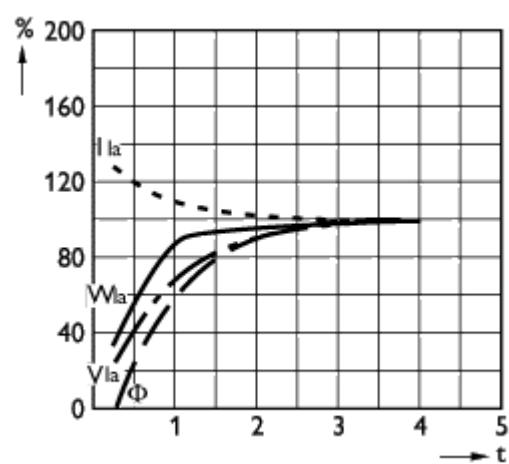

MASTERC CDM- T

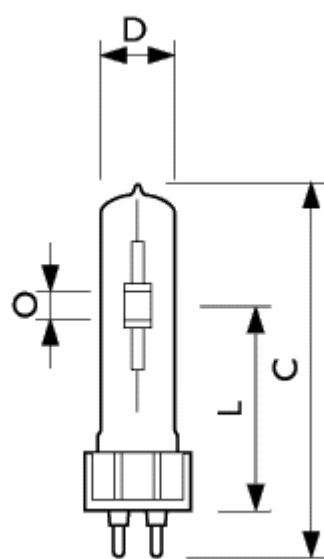

MASTERC CDM- T

	C		D		L		O	
Full produ ct name	Max		Max	Min	Nom	Max	Min	
MAST ERCol our CDM- T 150W /830 G12 1CT	110		20	55	56	57	8.67	

O	
Nom	Max
9	9.33

