



TL 80W/10-R SLV

Product family description
Tubular low-pressure mercury vapour
fluorescent lamps


Product Features

- Emit long-wave UV-A radiation in the 350 - 400 nm range
- UV-B/UV-A ratio less than 0.1% (UV-B: 280 - 315 nm)
- R (Reflector) lamps have a 200° internal reflector
- Photopolymerisation processes
- Insect traps
- Reprography


Application

Product data	
Order code	612625 40
Full product code	871150061262540
Full product name	TL 80W/10-R SLV
Order product name	TL 80W/10-R SLV/25
Packing type	1 Sleeve
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500612625
Bar code on intermediate packing - EAN2	
Bar code on outerbox - EAN3	8711500612632
Logistic code(s) - 12NC	9280 059 01029
ILCOS code	
Net weight per piece	331.000 (GR)
Successor order code	
Rated Lamp Wattage[W]	80W
Colour Code	10-R
Packing Type	SLV [1 Sleeve]
Packing Configuration	25
Cap-Base	G13
Cap-Base Information	-
Bulb	T38
Main Application	Reprography
Additional Information	-
Useful Life[hr]	1000

Product data	
Product Nett Weight[gr]	360
Technical Lamp Power[W]	80
Lamp Voltage[V]	110
Lamp Current[A]	0.83
Beam Description	-
Colour Designation (text)	Ultra Violet A
UV-A Radiation 100hr (IEC)[W]	20.5
UV-B/UV-A (IEC)[%]	0.1

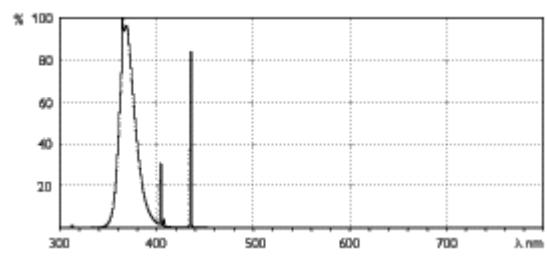

TL/10-R

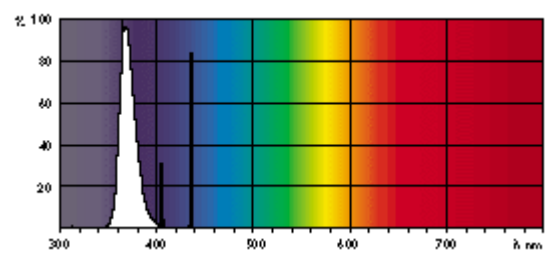

TL/10-R

